


# RocketRAID 2312

2 Internal and 2 External eSATA PCI-e SATA II RAID Controller

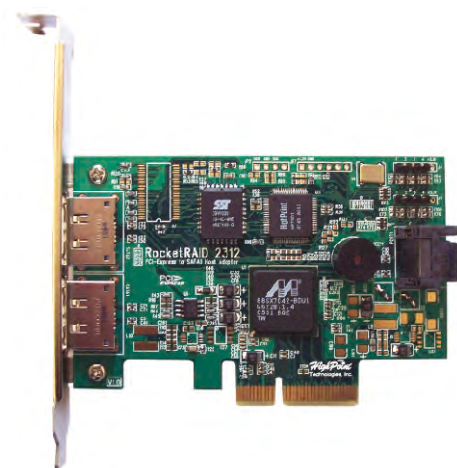

- PCI-e x4 (x8 and x16) slot compatible
- 2 Internal and 2 External eSATA II ports at 3Gb/s per port
- Up to 4 SATA II or SATA I Hard Drives
- Support RAID 0, 1, 5, 10, and JBOD
- Compatible with eSATA enclosures
- Native Command Queuing (NCQ) for improved random performance
- Online Capacity Expansion (OCE) and Online RAID Level Migration (ORLM)
- Staggered drive spin up
- Hard Disk (Activity / Failed) LED chassis function
- Bad Sector Repair / Remapping
- BIOS Booting (INT13) to RAID array
- Quick and Background initialization for instant RAID access
- Write through and write back cache for RAID arrays
- Hot swap and hot spare
- Online array roaming
- Automatic detect drive to rebuild degraded RAID
- S.M.A.R.T array monitoring for hard drive status and reliability
- 64bit LBA for RAID arrays greater than 2TB
- Web browser-base software (Web GUI)
- Command Line Interface (CLI)
- SMTP email notification for events and error reporting
- Remote array management through (Web GUI, RAID GUI and CLI)
- Support Windows (XP, 2000, Server 2003, x64 Edition and (32 and 64bit) Vista), Linux, FreeBSD and Mac OS X
- RoHS Compliant

# RocketRAID 2312

## 2 Internal and 2 External eSATA PCI-e SATA II RAID Controller

### Peak Speeds (USB, Firewire and SATA)

Many existing external hard drives use USB and/or 1394. These interfaces are not nearly as fast as SATA when compared using peak values, and can compromise drive performance.

### External SATA (eSATA) Features and Benefits

Initially SATA was designed as an internal or inside-the-box interface technology, bringing improved performance and new features to internal PC or consumer storage. Creative designers quickly realized the innovative interface could reliably be expanded outside the PC, bringing the same performance and features to external storage needs instead of relying on USB or 1394 interfaces.

Called external SATA or eSATA, customers can now utilize shielded cable lengths up to 2 meters outside the PC to take advantage of the benefits the SATA interface brings to storage. SATA is now out of the box as an external standard, with specifically defined cables, connectors, and signal requirements released as new standards in mid-2004. eSATA provides more performance than existing solutions and is hot pluggable.

- \* Key benefits of eSATA: Up to 6 times faster than existing external storage solutions: USB 2.0, & 1394
- \* Robust and user friendly external connection
- \* High performance, cost effective expansion storage
- \* Up to 2 meter shielded cables and connectors

### COMPREHENSIVE OS SUPPORT

HighPoint offers the broadest range of support for all major operating systems to ensure OS and hardware server compatibility. Drivers are available for all major operating systems, including Windows, Linux and FreeBSD.

### PHYSICAL SPECIFICATIONS

Size: (101.4mm x 105.9mm)3.99"L x 4.16"W

EMI : FCC Part 15 Class B and CE

### Thermal and Atmospheric Characteristics:

Work Temperature Range : +5°C ~+ 40°C

Relative Humidity Range : 20% ~ 80% non condensing

Storage Temperature : ~-40°C~ 60°C

MTBF: 920,585 Hours

### Electrical Characteristics:

PCI+3.3V : 3.3A

Power : 10W

### RocketRAID 2312 Specification

Host Side Interface	PCI-e x4 (x8 and x16) compatible
Device Interface	SATA I or SATA II
Number of Channels	2 Internal SATA / 2 External eSATA
Supported RAID Levels	RAID 0, 1, 5, 10, and JBOD
Operating Systems Support	Windows, Linux, FreeBSD and Mac OS X
RAID Management Tool	BIOS Web based RAID Management Software and CLI
Some Highlighted Features	Hot swap/hot spare 64bit LBA for over 2TB partition support Bad Sector Repair / Remapping SMTP support for email notification OCE/ORLM Automatic RAID Rebuild Online Array Roaming

### Company Information

**U.S. Headquarter**  
 Address: 1161 Cadillac Ct. Milpitas CA 95035  
 Phone: 1-408-942-5800  
 Fax: 1-408-942-5801  
 E-mail: sales@highpoint-tech.com  
 Support: support@highpoint-tech.com

**HighPoint Taiwan**  
 Address: 5F., No.3, Swei Lane, Jhongjheng Rd., Sindian City, Taipei County 231, Taiwan (R.O.C.)  
 Phone: +886-2-2218-3435  
 Fax: +886-2-2218-3436  
 E-mail: sales@highpoint-tech.com  
 Support: support@highpoint-tech.com

**HighPoint China**  
 Address: No. 12, Zhong Guan Cun South Rd, Beijing, China  
 Phone: +86-10-68918759  
 Fax: +86-10-68975074  
 E-mail: sales@microaurora.com.cn  
 Support: support@microaurora.com.cn



Product pictures and specifications are subject to change without notice. All trademarks are the property of their respective holders. Copyright © 2007 by HighPoint Technologies, Inc.

three limited warranty information