

Other World Computing Edimax Wireless N card Setup

Requirements:


Edimax USB, PCI and PCMCIA wireless device.

Mac OS 10.3-10.4.x

A. Software Installation

1) Download the Mac Driver form the URL below:

http://eshop.macsales.com/images/Items/EDMEW7728IN/STA_Cardbus+mPCI+PCIe_MacOSX_2007_04_04.dmg

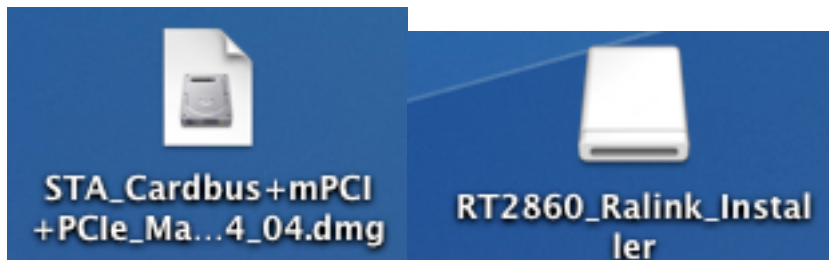

2) Locate double click on the file from where ever you downloaded it to. Usually Documents or Desktop. Once you double click on the .dmg file an image should appear called RT2860... double click the image to open it.





CardbusPCIWireless-10.3




CardbusPCIWireless-10.4

3) Open the folder that corresponds to the Operating system you are running.


 CardbusPCIWireless-Tiger.pkg
 uninstall.command

4) Now double click on the .pkg file.


Note: *If you ever want to uninstall the software simply double click on the uninstall.command*

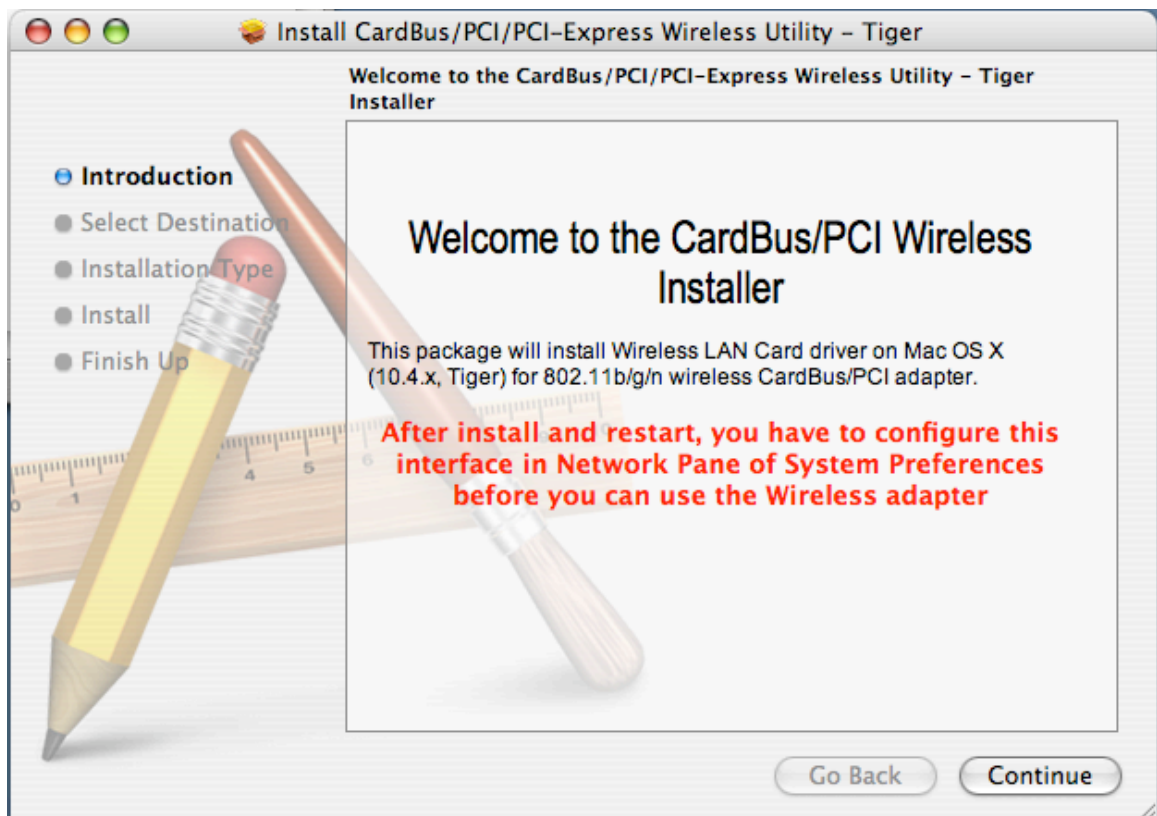


5) Click "Continue"

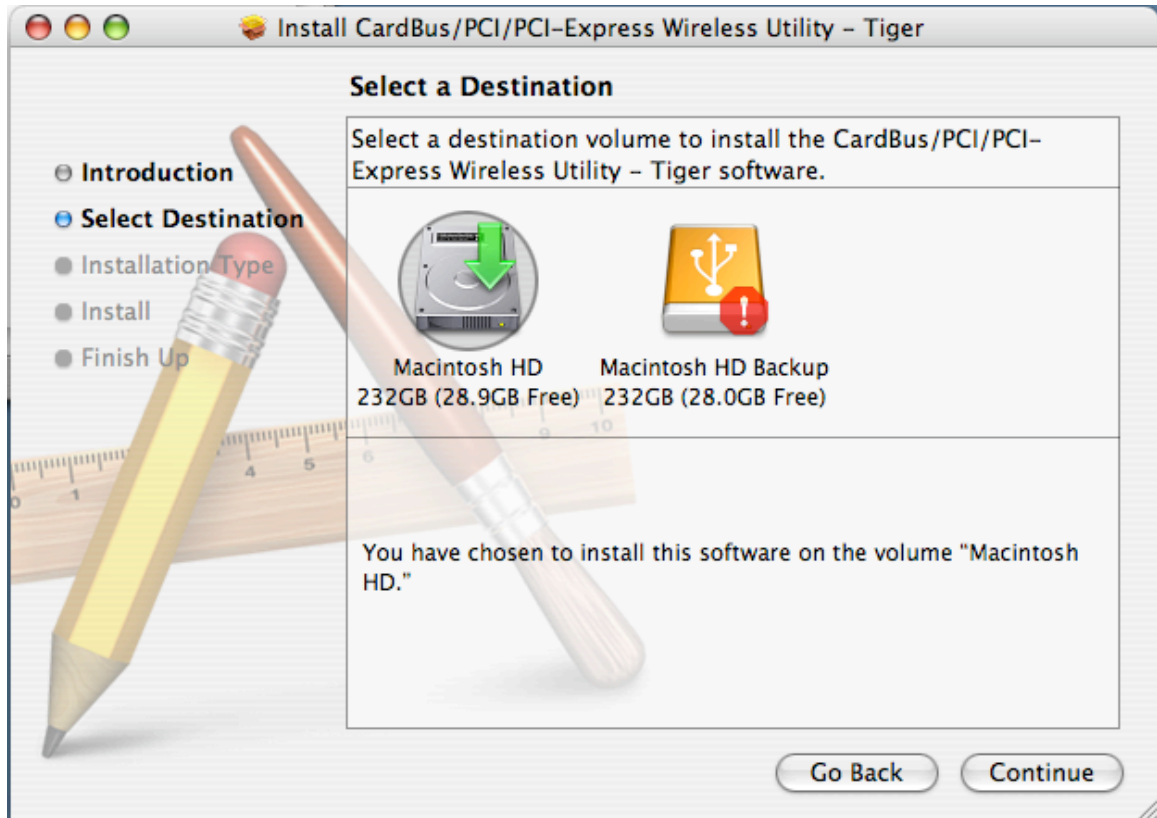


6) Select your OS Hard Drive for the install destination and click "Continue".

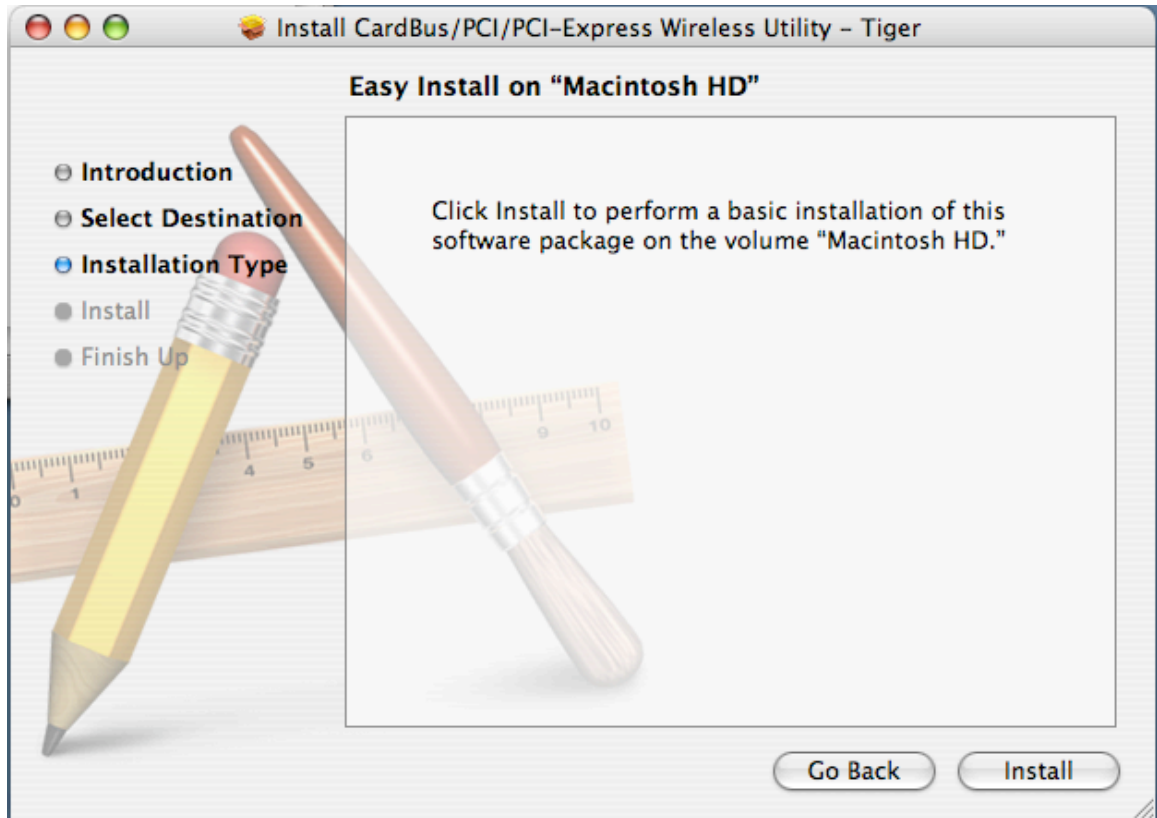

7) Next click "Install".

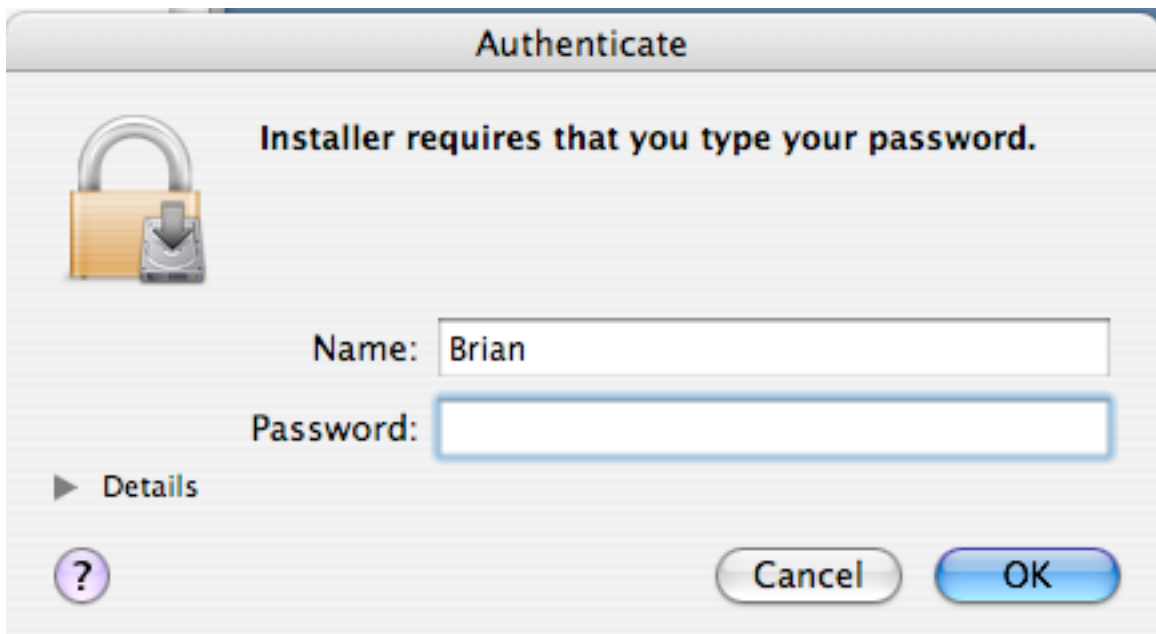

8) You will be prompted for your password, please enter it and hit "OK". *Note: You must have administrative privileges to install this software on your Mac.*

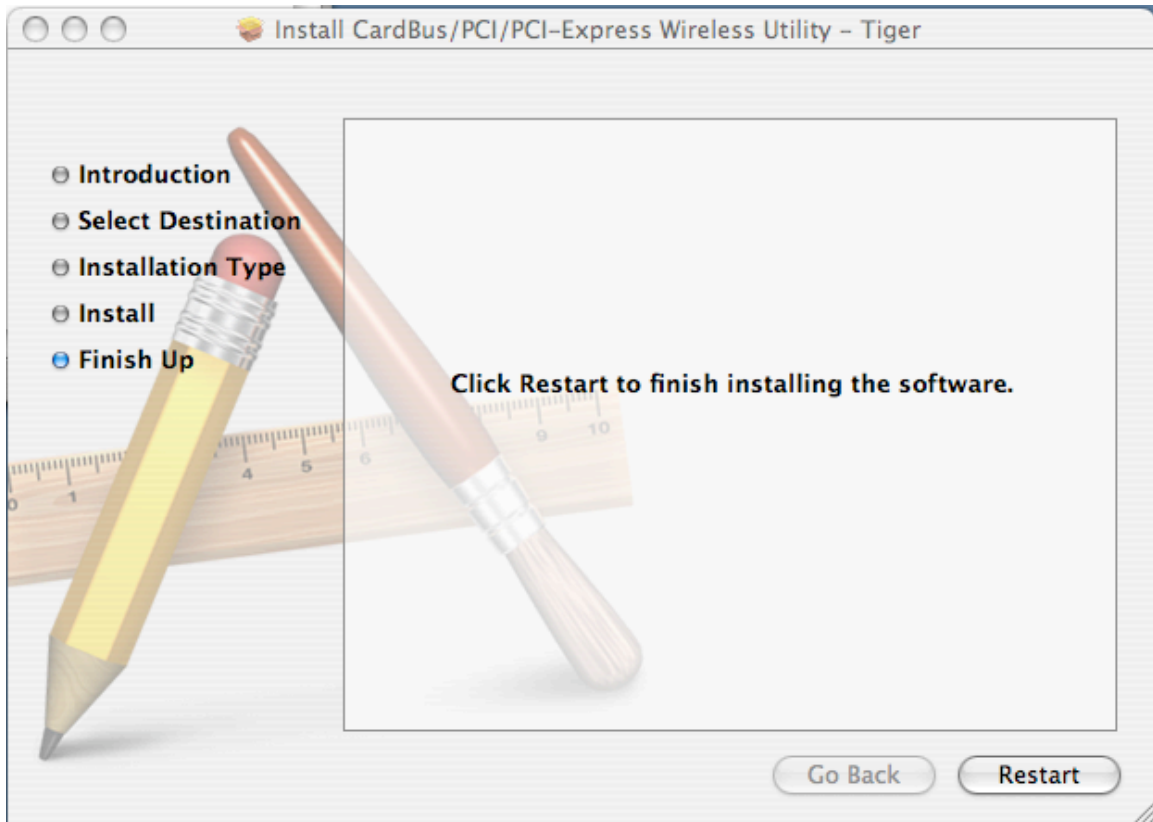


9) Close any Applications and Save any work and click "Restart".


A. Wireless Configuration

Preface: Go to the "Apple" menu and "System Preferences". Click on "Network" it should pop up "Detected a new Network port" Click "OK" Then "Apply" and close System Preferences.


The Edimax Software gets installed in your "Applications" Folder.

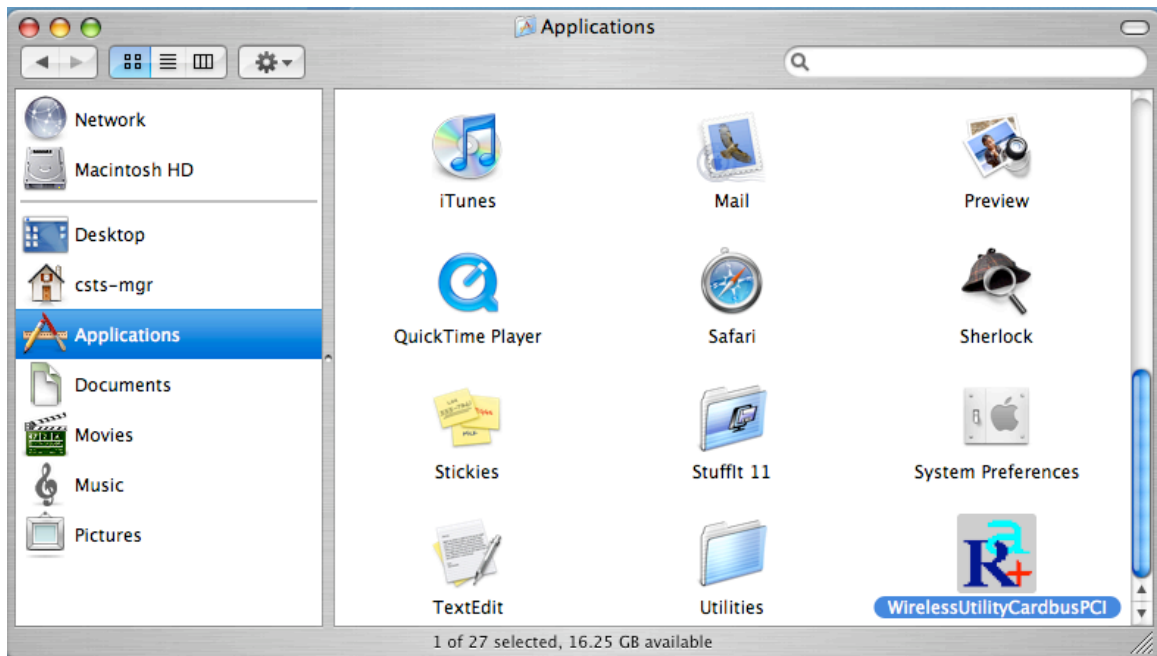

- 1) Double click on the **WirelessUtilityCardbusPCI** icon to setup your wireless connection.

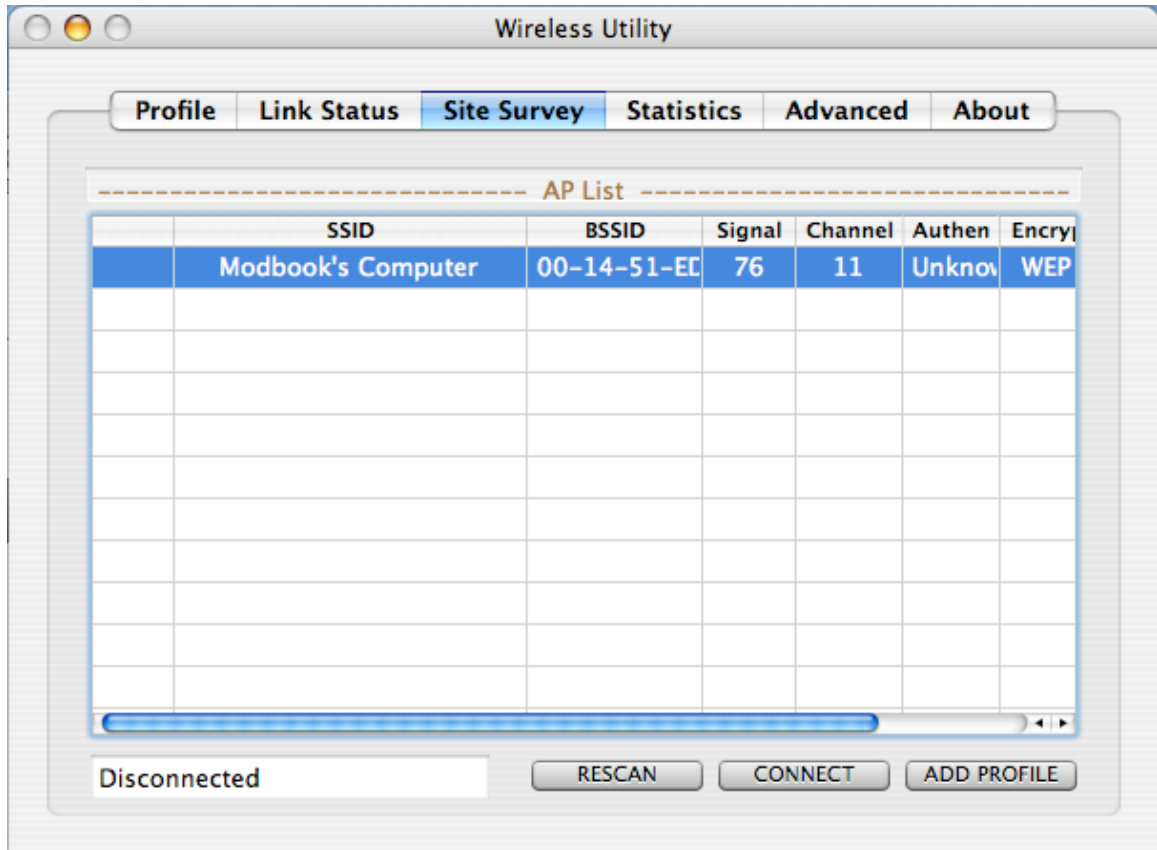

- 2) Click on the "Site Survey Tab" Here you should see your wireless Network. If you don't hit rescan, if it still doesn't appear please consult your wireless routers manufacturers manual or support.
- 3) Click on the Wireless network you want to connect so it's highlighted to and hit "ADD Profile".

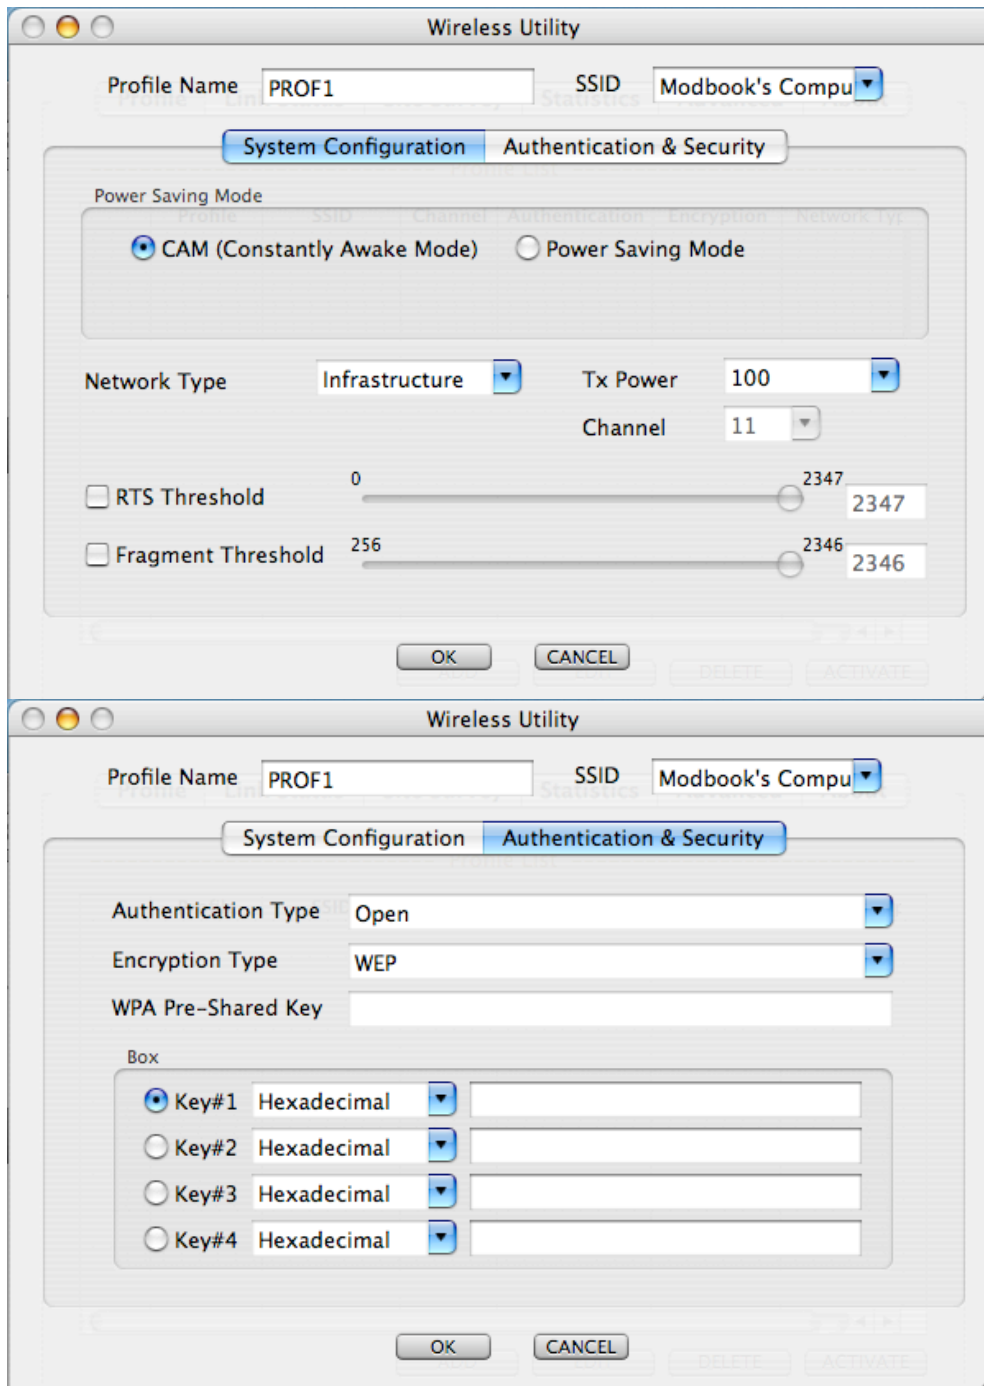

- 4) Here you can name the profile and adjust any settings needed to connect to the network. Click on "Authentication & Security" to enter any security information needed to connect to your wireless network.

Note: Please see your router or "Airports" manual or support for information regarding security settings and wireless configurations of your Network.

5) Click "OK" and go to the "Profiles" Tab. Highlight the network you just added and click Activate to use that profile.

	PROF1	Modbook's C	Auto	Open	WEP	Infrastruct
---	-------	-------------	------	------	-----	-------------


	Profile	SSID	Channel	Authentication	Encryption	Network Type
	PROF1	Modbook's C	Auto	Shared	WEP	Infrastruct

You will notice the connection go from red to green when you are connected. Your wireless connection is now setup and ready to be used.


Note: If you would like the wireless connection to be started immediately when the computer is booted please follow the steps below. Otherwise you will need to go into your Applications and open the wireless utility every time you want to connect.

C. Adding the Utility to Startup Items.

1) Go to the "Apple" menu and "System Preferences" and click on "Accounts".

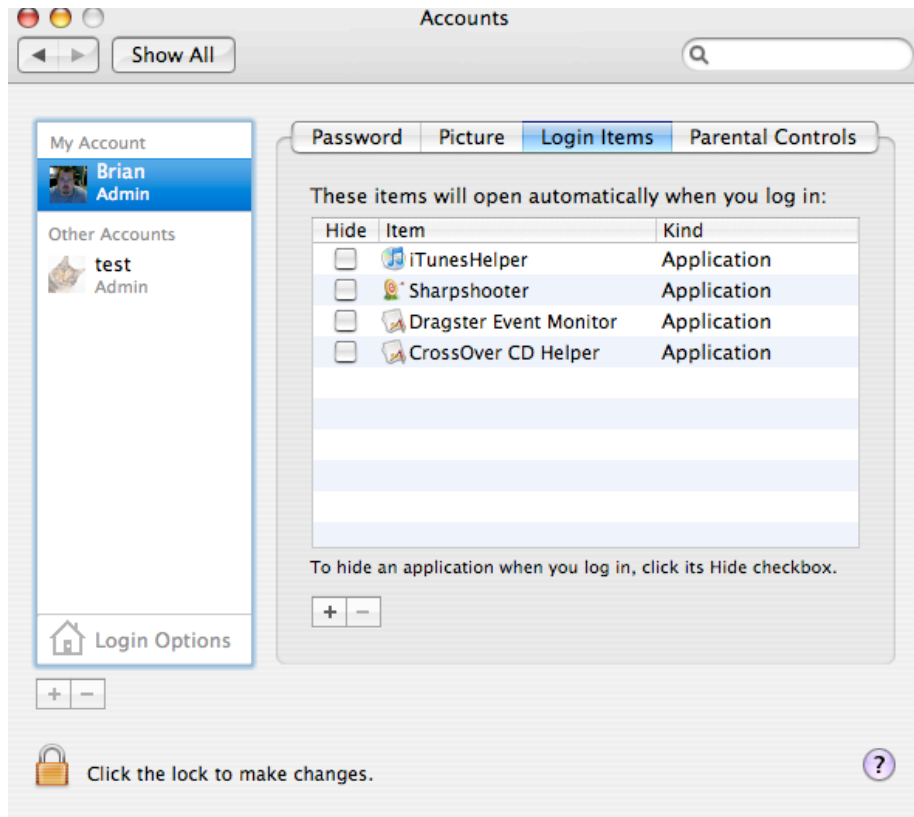

2) Highlight the account you want to add the utility as a startup item and click on the "Login Items".

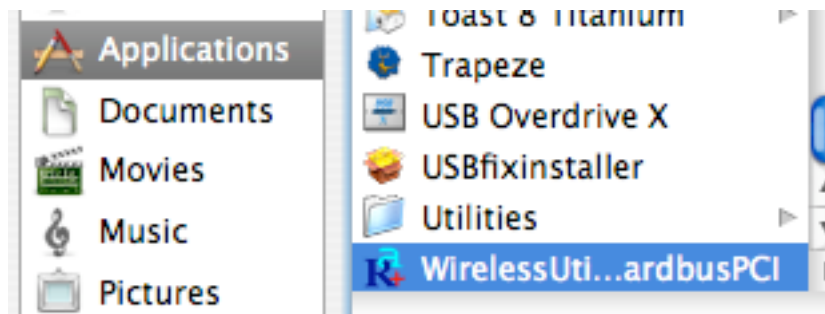

3) Click the "+" sign at the bottom and select the Wireless Utility in your Applications folder. Close System Preferences and you are all done.