

Memory (Upper RAM Slot) Replacement Instructions

Be sure to follow the instructions in this sheet carefully. Failure to follow these instructions could result in damage to your equipment and may void your warranty.

Replacing memory in your computer requires seven basic steps:

- Turn off the computer.
- Open the computer.
- Remove the heat shield.
- Remove the RAM you are replacing.
- Install the replacement RAM.
- Replace the heat shield.
- Close the computer.

Note: A video version of the installation instructions is available at <http://www.info.apple.com/installparts>

Tools Required

- Jeweler's flat-blade screwdriver
- Phillips screwdriver

Electrostatic Discharge (ESD)

Static electricity, a normal and natural phenomenon, builds up on your body as you walk around. You experience an electrostatic discharge (ESD) when you touch an object and feel a spark. ESD can cause damage to the internal components of your computer.

To avoid ESD damage, read and follow all instructions. If a grounding wrist strap is included with your replacement memory, refer to the instructions included for how to ground and use the strap.

About Memory

Your computer comes with a minimum of 64 megabytes (MB) of synchronous dynamic random-access memory (SDRAM) installed in a RAM slot on the bottom of the processor module. On the top of the processor module is another RAM slot you can use to add additional memory to your PowerBook.

RAM Specifications

The expansion slots on the top and bottom of the processor module can accept up to a 2-inch SDRAM card that meets the following specifications:

- small outline-dual inline memory module (SO-DIMM) format
- 16, 32, 64, 128, or 256 MB
- 144-pin
- PC-100 Type RAM

SDRAM from earlier PowerBook models cannot be used.


Maximum RAM Configurations

The maximum amount of RAM you can install in your PowerBook is 512 MB, using 256 MB DIMMs in both the top and bottom RAM slots. To install RAM in the bottom RAM slot, refer to the document called "Memory (RAM) Replacement Instructions."

Removing RAM From the Upper RAM Slot


Warning: Always turn off your computer before opening it to avoid damaging its internal components.

- 1 Place your computer on a clean, flat surface.
- 2 Shut down your computer, remove the battery from the expansion bay, and disconnect the power adapter, modem, and any other cables connected to the computer.

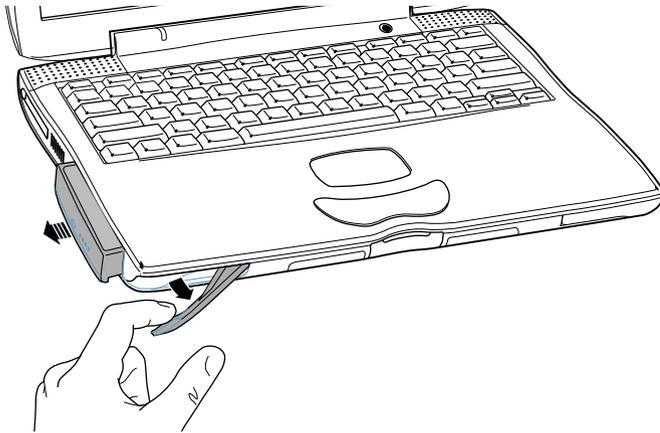


Warning: The internal components of your PowerBook may be hot. If you have been using your PowerBook, wait 30 minutes after shutting down your computer to let the internal components cool down before continuing.


- 3 Make sure that the keyboard locking screw is not in the locked position. Your new PowerBook comes with the keyboard unlocked, so unless you or someone else locked the keyboard, you can skip this step.

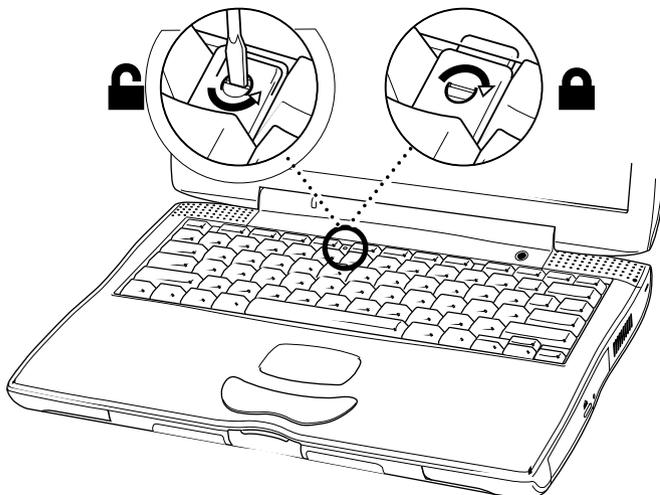


- 4 Release the keyboard by pulling down on the keyboard release tabs (located to the left of the F1 and F9 keys) until the top portion of the keyboard pops up.

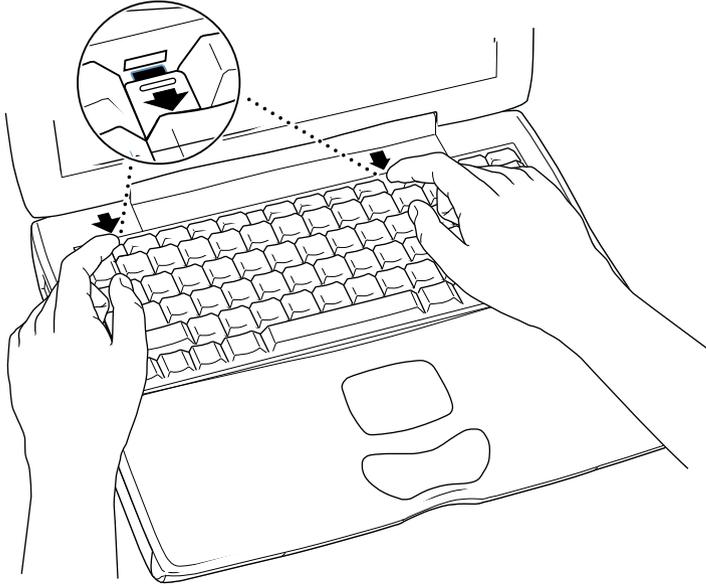

- 5 Lift the top portion of the PowerBook keyboard up slightly near the top row of keys and pull it back far enough to release the small tabs that hold the bottom of the keyboard in place.

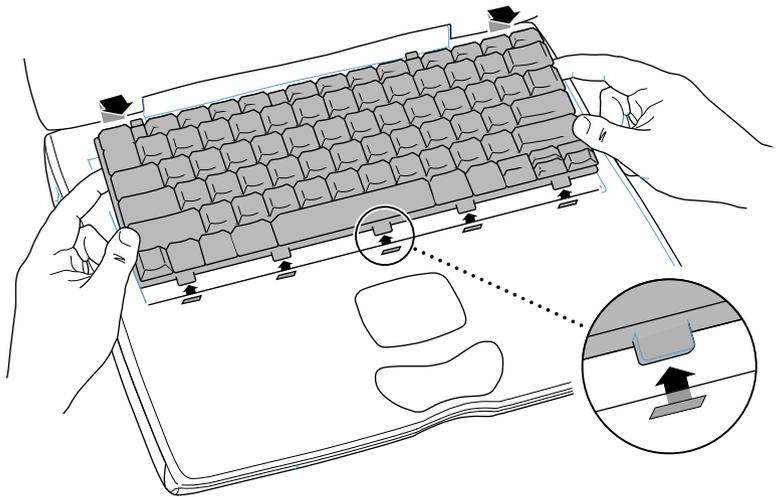


- 6 Flip the keyboard over and lay it on the palm rests.

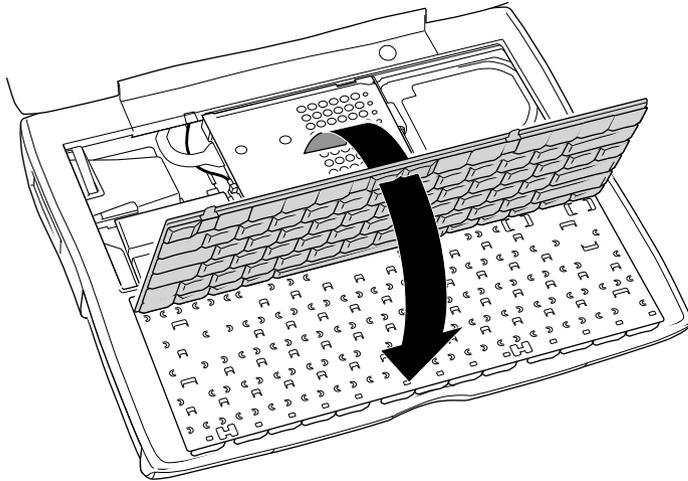

- 7 Touch a metal surface inside the computer to discharge any static electricity.

Important: To avoid electrostatic discharge, always ground yourself by touching a metal surface before you touch any parts or install any components inside the computer. To avoid static electricity building back up in your body, do not walk around the room until you have completed your installation and closed the computer.


- 8 With a Phillips screwdriver, remove the screws that secure the internal heat shield.

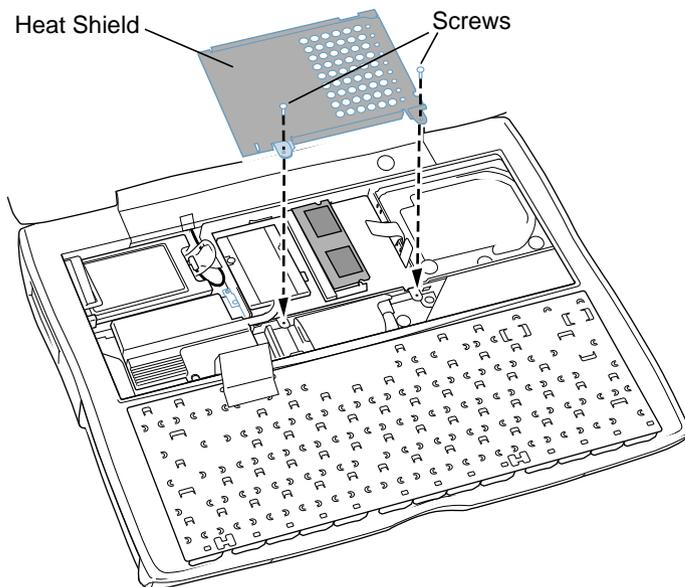

- 9 Lift up the internal heat shield.


- 10 Release the existing RAM expansion card at the two snaps so the card pops up. Then pull the expansion card out of the expansion slot.

Warning: When removing or installing the RAM card, do not touch its connectors. Handle the RAM card only by the edges.

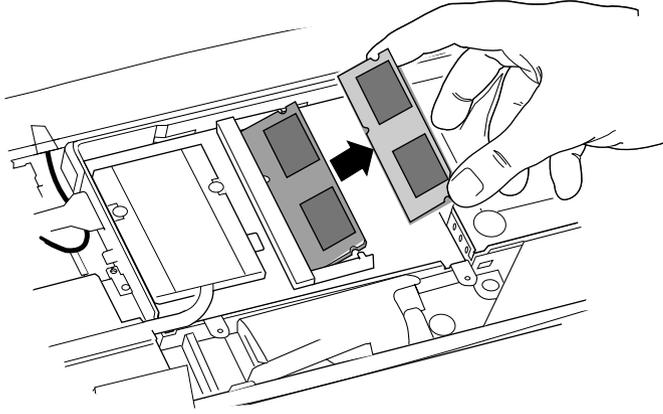


Installing Replacement RAM in the Upper RAM Slot

- 1 Locate the empty RAM expansion slot.

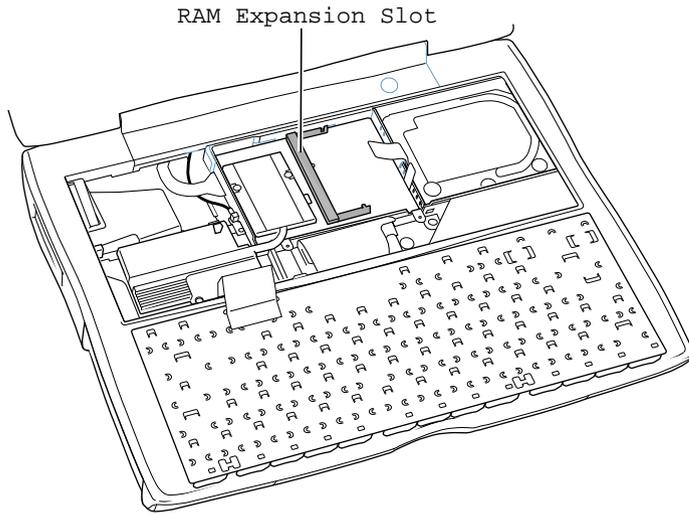


- 2 Hold the RAM expansion card at a 30-degree angle. Line up the notch in the card with the small tab in the RAM expansion slot. Then push the RAM expansion card into the expansion slot.

Warning: When removing or installing the RAM card, do not touch its connectors. Handle the RAM card only by the edges.

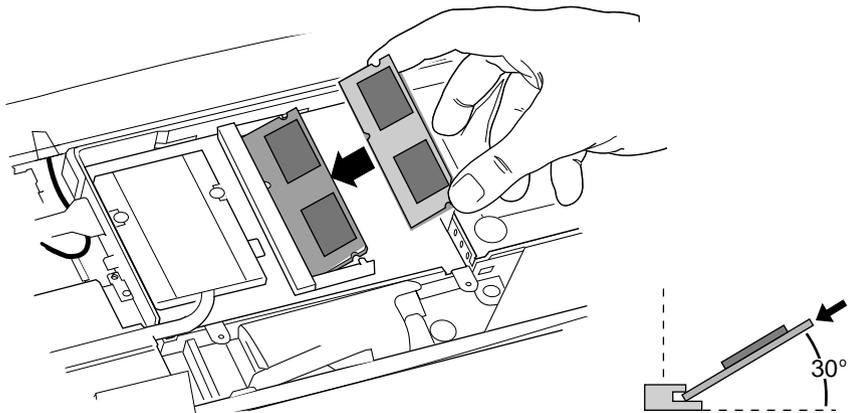


Note: You may feel some resistance. If you are having trouble inserting the card, try pushing one side at a time.

- 3 Gently push the RAM expansion card down until the two snaps on either side of the card lock into place.

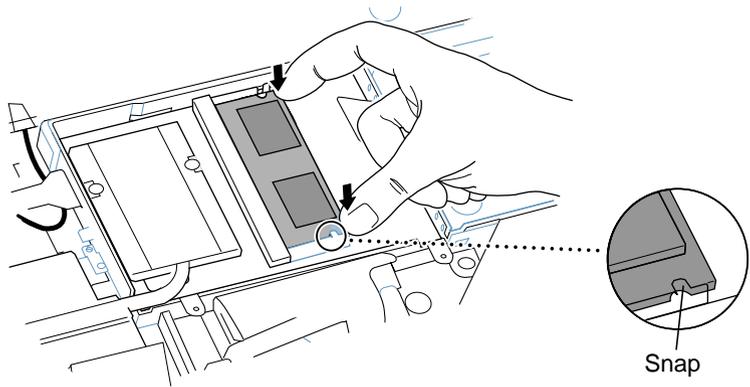


- 4 Insert the internal heat shield.

Important: When replacing the internal heat shield, make sure it does not cover the plastic tabs for the hard disk and optional AirPort Card. The plastic tab for the processor module should be placed under the heat shield.

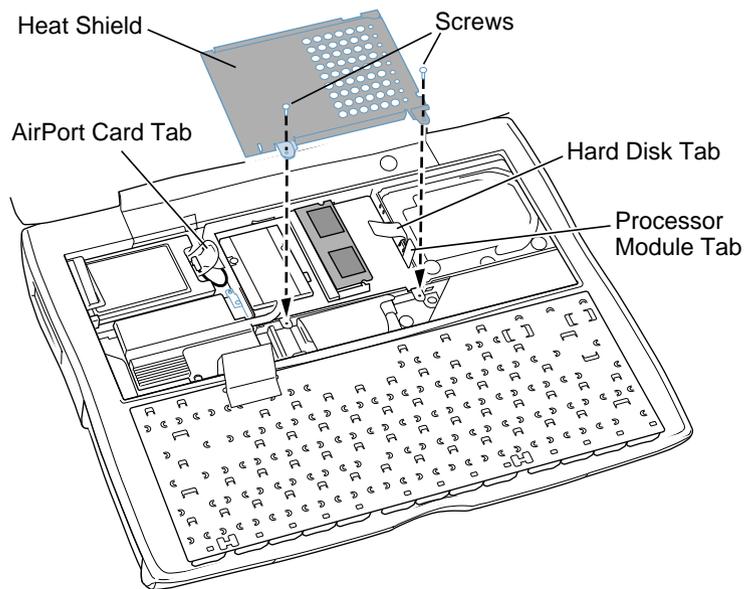


- 5 Press down on the bottom portion of the heat shield to secure it and then replace the screws.

- 6 Flip the keyboard over and insert the small tabs at the bottom of the keyboard into the openings in the PowerBook case.

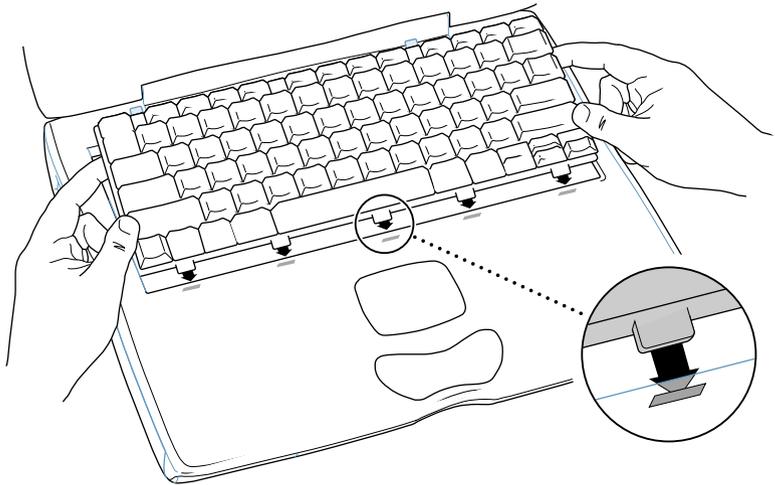

- 7 Pull down on the keyboard release tabs (located to the left of the F1 and F9 keys) and then press down on the top portion of the keyboard.

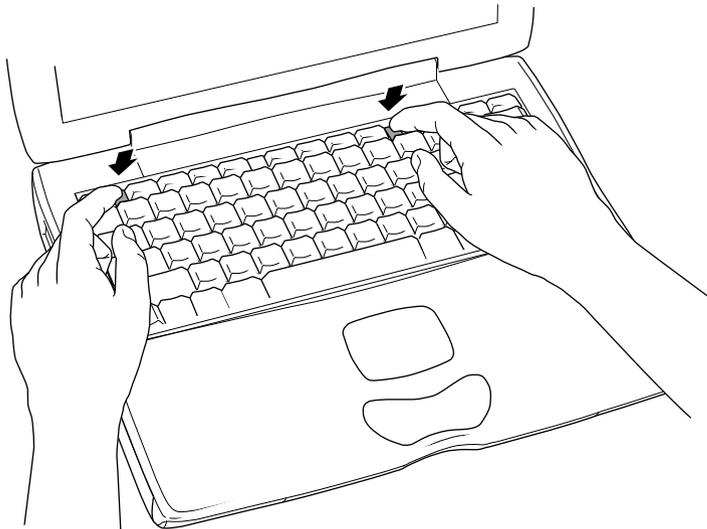

- 8 Let go of the keyboard release tabs to secure the keyboard in place.
- 9 Replace the PowerBook battery or plug in the power adapter.

Warning: Never turn on your computer unless all of its internal and external parts are in place and it is closed. Operating the computer when it is open or missing parts can damage your computer or cause injury.

- 10 Restart the computer.

 Apple Computer, Inc.

© 2000 Apple Computer, Inc. All rights reserved.

Under the copyright laws, this document may not be copied, in whole or in part, without the written consent of Apple.

The Apple logo is a trademark of Apple Computer, Inc., registered in the U.S. and other countries. Use of the “keyboard” Apple logo (Option-Shift-K) for commercial purposes without the prior written consent of Apple may constitute trademark infringement and unfair competition in violation of federal and state laws.

Every effort has been made to ensure that the information in this document is accurate. Apple is not responsible for printing or clerical errors.

Apple Computer, Inc.
1 Infinite Loop
Cupertino, CA 95014-2084
408-996-1010
<http://www.apple.com>

Apple, the Apple logo, FireWire, and PowerBook are trademarks of Apple Computer, Inc., registered in the U.S. and other countries.