


Other World Computing



Remove the top cover and you will expose the interposer board inside of the OWC Envoy.

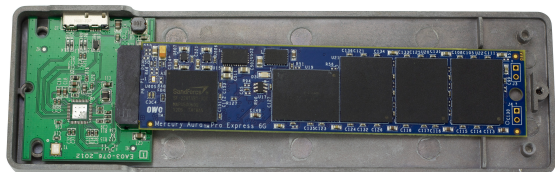

Insert your SSD module into the interposer board connector - it is keyed so it will only fit one direction. The drive module plugs straight into the connector and fits snugly.



Replace the bottom cover onto the OWC Envoy. Reinsert the 2 Phillips screws through the bottom and apply the 2 rubber feet to complete the assembly.

Your OWC Envoy connects using the included USB cable. If your SSD module is unformatted, you will need to format it to be able to use it.

http://eshop.macsales.com/tech_center/fwhdd.cfm



OWC Envoy *for MacBook Air 2012*

Owner's Manual & Assembly Guide

1.1 System Requirements

1.1.1 Mac Requirements

- Minimum PowerPC G4 CPU, 128MB RAM
- USB 3.0/2.0 interface, Mac OS X 10.2 or later

1.1.2 PC Requirements

- Minimum 500MHz Intel Pentium III CPU, 128MB RAM
- USB 3.0/2.0 interface, Windows 2000 / XP / Vista / Windows 7 / Windows 8

1.1.3 Supported SSD Drives

- MacBook Air 2012 SSD
- OWC Aura Pro SSD for the 2012 MacBook Air

**Item**


- ① USB 3.0 (A - Micro-B) cable
- ② OWC Envoy
- ③ Adhesive Rubber Feet
- ④ Plush Storage Bag
- ⑤ Owner's Manual & Assembly Guide



Your computer is a static-sensitive device. It is susceptible to invisible damage if not protected during installation.

We recommend proper grounding by using a grounding strap. Make sure to work in a clean and static-free area, and avoid wearing clothing that retains static charges.

For more information, please visit <http://www.macsales.com/static>

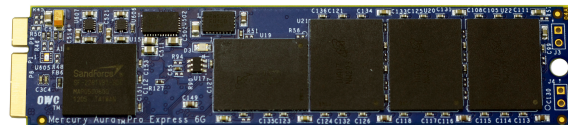

The OWC Envoy is compatible with both factory MacBook Air 2012 SSD modules and OWC Aura Pro for MacBook Air 2012 SSD modules.



Using a Phillips P0 screwdriver, remove the 2 Phillips screws that are holding the top and bottom of the OWC Envoy together. Note they are two lengths, the short screw goes on the skinny end of the OWC Envoy, and the longer screw goes on the thicker end.